


Tubular Filters

14300 Series Filters

II Section

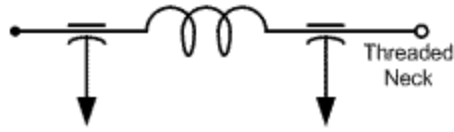

Specifications

Part No.	Current		Voltage		Insertion Loss Curve	Length	Dia.	Part No.	Current		Voltage		Insertion Loss Curve	Length	Dia.
	Amps	AC	DC	dB					Inch	Inch	Amps	AC			
F14311	1	30	100	A	2.38	0.75	F14351	10	30	100	A	3.00	1.50		
F14312	1	60	200	A	2.38	0.75	F14352	10	60	200	A	3.00	1.50		
F14313	1	125	400	A	2.43	1.00	F14353	10	125	400	A	3.13	1.50		
F14314	1	250	600	A	2.50	1.25	F14354	10	250	600	A	3.50	1.50		
F14321	2	30	100	A	2.43	1.25	F14361	20	30	100	A	3.50	1.75		
F14322	2	60	200	A	2.43	1.25	F14362	20	60	200	A	3.50	1.75		
F14323	2	125	400	A	2.50	1.25	F14363	20	125	400	A	3.75	1.75		
F14324	2	250	600	A	2.63	1.25	F14364	20	250	600	A	4.00	1.75		
F14331	3	30	100	A	2.43	1.25	F14371	30	30	100	A	3.75	2.00		
F14332	3	60	200	A	2.43	1.25	F14372	30	60	200	A	3.75	2.00		
F14333	3	125	400	A	2.50	1.25	F14373	30	125	400	A	4.00	2.00		
F14334	3	250	600	A	2.63	1.25	F14374	30	250	600	A	4.25	2.00		
F14341	5	30	100	A	2.63	1.50	F14381	50	30	100	B	4.50	2.50		
F14342	5	60	200	A	2.63	1.50	F14382	50	60	200	B	4.50	2.50		
F14343	5	125	400	A	2.75	1.50	F14383	50	125	400	B	4.75	2.50		
F14344	5	250	600	A	3.00	1.50	F14384	50	250	600	B	5.00	2.50		
F14351	10	30	100	A	3.00	1.50									

Insertion Loss Data

