


METALLIZED POLYESTER FILM CAPACITORS

TYPE : MEM


1. Space-saving miniature size.
2. Non-inductive construction.
3. Self-healing property.
4. Flame-retardant plastic case and epoxy resin.
(compliance with UL 94V-0)
5. High moisture-resistance.
6. Good solderability.
7. Available on tape and reel for automatic insertion.

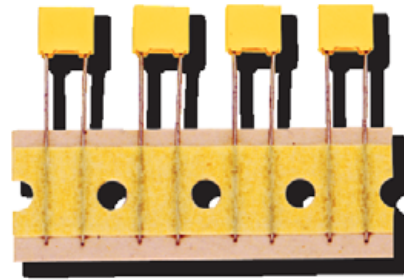

SPECIFICATIONS :

OPERATING TEMPERATURE	-40 ~ +100°C
RATED VOLTAGE	63, 100, 250, 400V.D.C
CAPACITANCE RANGE	0.001 ~ 1 μ F
DIELECTRIC STRENGTH	175% of rated voltage for 1 minute
CAPACITANCE TOLERANCE	$\pm 5\%$ (J) $\pm 10\%$ (K) $\pm 20\%$ (M)
INSULATION RESISTANCE	C \leq 0.33 μ F IR \geq 10,000M Ω C > 0.33 μ F IR \geq 3,300M $\Omega \cdot \mu$ F
DISSIPATION FACTOR	1% MAX. at 1KHZ

TYPE : MEM

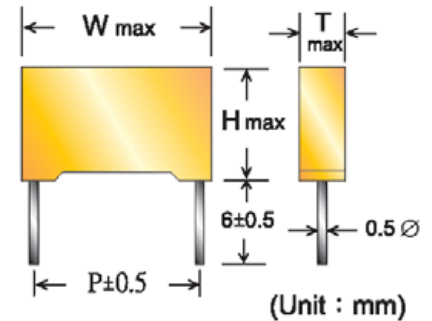

μ F SIZE	LEAD SPACING 5.0mm				LEAD SPACING 7.5mm																			
	63V- / 40V~				100V- / 63V~				63V- / 40V~				100V- / 63V~				250V- / 160V~				400V- / 200V~			
	W	H	T	P	W	H	T	P	W	H	T	P	W	H	T	P	W	H	T	P	W	H	T	P
0.001					7.2	6.5	2.5	5.0																
0.0015					7.2	6.5	2.5	5.0																
0.0022					7.2	6.5	2.5	5.0																
0.0033					7.2	6.5	2.5	5.0																
0.0047					7.2	6.5	2.5	5.0													10.5	6.5	3.5	7.5
0.0068					7.2	6.5	2.5	5.0													10.5	6.5	3.5	7.5
0.01					7.2	6.5	2.5	5.0													10.5	6.5	3.5	7.5
0.015					7.2	6.5	2.5	5.0													10.5	6.5	3.5	7.5
0.022					7.2	6.5	2.5	5.0													10.5	6.5	3.5	7.5
0.033					7.2	6.5	2.5	5.0					10.5	6.5	3.5	7.5	10.5	9.0	4.0	7.5	10.5	6.5	6.0	7.5
0.047	7.2	6.5	2.5	5.0	7.2	6.5	3.0	5.0					10.5	6.5	3.5	7.5	10.5	9.0	4.0	7.5				
0.068	7.2	6.5	2.5	5.0	7.2	7.5	3.5	5.0	10.5	6.5	3.5	7.5	10.5	9.0	4.0	7.5	10.5	11.0	5.0	7.5				
0.1	7.2	6.5	3.0	5.0	7.2	9.5	4.5	5.0	10.5	6.5	3.5	7.5	10.5	9.0	4.0	7.5	10.5	11.0	5.0	7.5				
0.15	7.2	7.5	3.5	5.0	7.2	10.0	5.0	5.0	10.5	6.5	3.5	7.5	10.5	9.0	4.0	7.5	10.5	12.0	6.0	7.5				
0.22	7.2	7.5	3.5	5.0	7.2	11.0	6.0	5.0	10.5	9.0	4.0	7.5	10.5	11.0	5.0	7.5								
0.33	7.2	9.5	4.5	5.0					10.5	9.0	4.0	7.5	10.5	11.0	5.0	7.5								
0.47	7.2	10.0	5.0	5.0					10.5	11.0	5.0	7.5												
0.68	7.2	11.0	6.0	5.0					10.5	11.0	5.0	7.5												
1	7.2	11.0	6.0	5.0					10.5	12.0	6.0	7.5												

Please contact us for special item or size not listed.