


# Tubular Filters

## 14100 Series Filters

### "L" Section (Style 1)

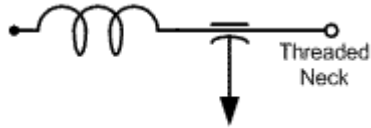

## Specifications

Part No.	Current		Voltage		Insertion Loss Curve	Length	Dia.	Part No.	Current		Voltage		Insertion Loss Curve	Length	Dia.
	Amps	AC	DC	dB					Inch	Inch	Amps	AC			
F14111	1	30	100	A	1.88	0.75	F14151	10	30	100	A	3.00	1.50		
F14112	1	60	200	A	1.88	0.75	F14152	10	60	200	A	3.00	1.50		
F14113	1	125	400	A	2.00	1.00	F14153	10	125	400	A	3.13	1.50		
F14114	1	250	600	A	2.50	1.25	F14154	10	250	600	A	3.75	1.50		
F14121	2	30	100	A	2.00	1.25	F14161	20	30	100	B	3.60	1.75		
F14122	2	60	200	A	2.00	1.25	F14162	20	60	200	B	3.60	1.75		
F14123	2	125	400	A	2.13	1.25	F14163	20	125	400	B	3.75	1.75		
F14124	2	250	600	A	2.63	1.25	F14164	20	250	600	B	4.00	1.75		
F14131	3	30	100	A	2.00	1.25	F14171	30	30	100	B	3.75	2.00		
F14132	3	60	200	A	2.00	1.25	F14172	30	60	200	B	3.75	2.00		
F14133	3	125	400	A	2.13	1.25	F14173	30	125	400	B	4.13	2.00		
F14134	3	250	600	A	2.63	1.25	F14174	30	250	600	B	4.38	2.00		
F14141	5	30	100	A	2.13	1.50	F14181	50	30	100	C	4.00	2.50		
F14142	5	60	200	A	2.13	1.50	F14182	50	60	200	C	4.00	2.50		
F14143	5	125	400	A	2.25	1.50	F14183	50	125	400	C	4.50	2.50		
F14144	5	250	600	A	2.75	1.50	F14184	50	250	600	C	4.75	2.50		

## Insertion Loss Data

