


Tubular Filters

14200 Series Filters

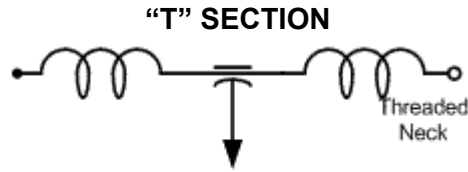

Specifications

Part No.	Current		Voltage		Insertion Loss Curve	Length	Dia.	Part No.	Current		Voltage		Insertion Loss Curve	Length	Dia.
	Amps	AC	DC	dB					Inch	Inch	Amps	AC			
F14211	1	30	100	A	2.25	0.75	F14251	10	30	100	A	4.00	1.50		
F14212	1	60	200	A	2.25	0.75	F14252	10	60	200	A	4.00	1.50		
F14213	1	125	400	A	2.38	1.00	F14253	10	125	400	A	4.25	1.50		
F14214	1	250	600	A	2.50	1.25	F14254	10	250	600	A	4.50	1.50		
F14221	2	30	100	A	2.38	1.25	F14261	20	30	100	B	4.25	1.75		
F14222	2	60	200	A	2.38	1.25	F14262	20	60	200	B	4.25	1.75		
F14223	2	125	400	A	2.50	1.25	F14263	20	125	400	B	4.50	1.75		
F14224	2	250	600	A	2.88	1.25	F14262	20	250	600	B	4.50	1.75		
F14231	3	30	100	A	2.38	1.25	F14271	30	30	100	B	4.63	2.00		
F14232	3	60	200	A	2.38	1.25	F14272	30	60	200	B	4.63	2.00		
F14233	3	125	400	A	2.50	1.25	F14273	30	125	400	B	4.75	2.00		
F14234	3	250	600	A	2.88	1.25	F14274	30	250	600	B	5.00	2.00		
F14241	5	30	100	A	2.75	1.50	F14281	50	30	100	B	4.75	2.50		
F14242	5	60	200	A	2.75	1.50	F14282	50	60	200	B	4.75	2.50		
F14243	5	125	400	A	3.00	1.50	F14283	50	125	400	B	5.00	2.50		
F14244	5	250	600	A	3.50	1.50	F14284	50	250	600	B	5.25	0.75		

Insertion Loss Data

